
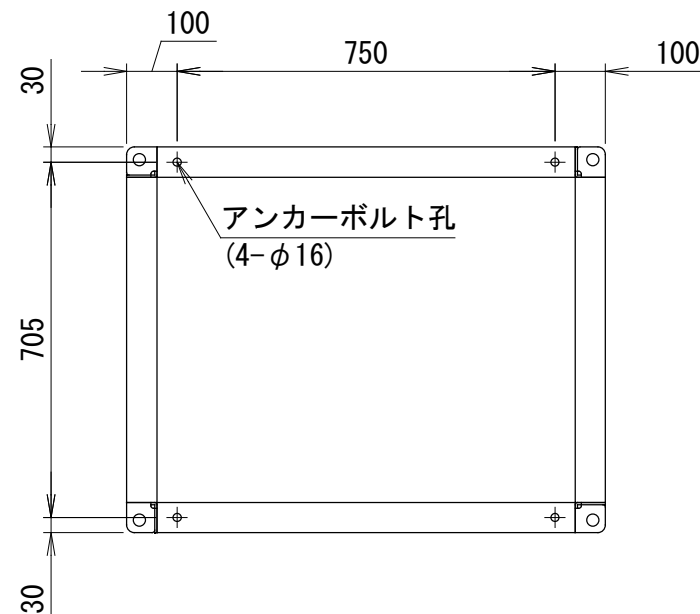


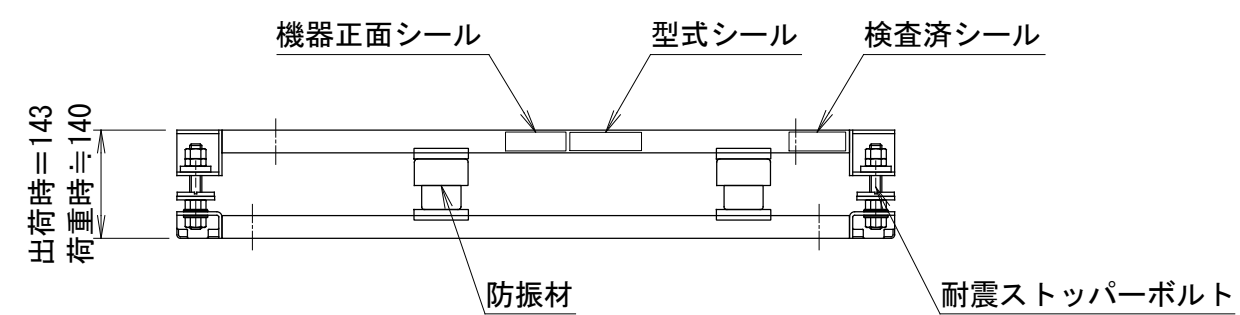

The diagram shows a mechanical assembly. A central component, which appears to be a small motor or actuator, is mounted on a base. This base is positioned between two horizontal plates. The left plate is labeled 'A' and the right plate is labeled 'B'. The central component is secured to the base by a bolt and nut. The entire assembly is shown in a cross-sectional view, with dashed lines indicating the internal structure and the path of the bolt.

防振架台仕様書				
型式	N－SPH950DCZE2			
機器				
現場名				

系統名				
架台質量		33 kg		
防振材(コイルスプリング)				
NS250-65		4.19[kgf/mm] 6 個		
上ベース	□60x30xt3.2	15.9 kg		
下ベース	□60x30xt3.2	12.8 kg		
耐震ストッパーボルト M16		4 本		
耐震基準		△3 水平 2.0 G, 鉛直 1.0 G		
表面処理		溶融亜鉛めっき △3 HDZT63		
適用地域		重塩害地域		
<付属品>				
機器固定ボルト		溶融亜鉛めっき		
M12x70L (平W, 角W, NTx2付)		4 組		
<備考>				
番号	日付	改訂記事		
△2	' 20. 06. 26	図枠更新		
△3	' 23. 02. 24	耐震基準表記・めっき表記変更		
発行日		承認	設計	作図
' 16. 06. 10		加納	内野	内野
ネミー株式会社				
図番	1－HTB515#E2			