
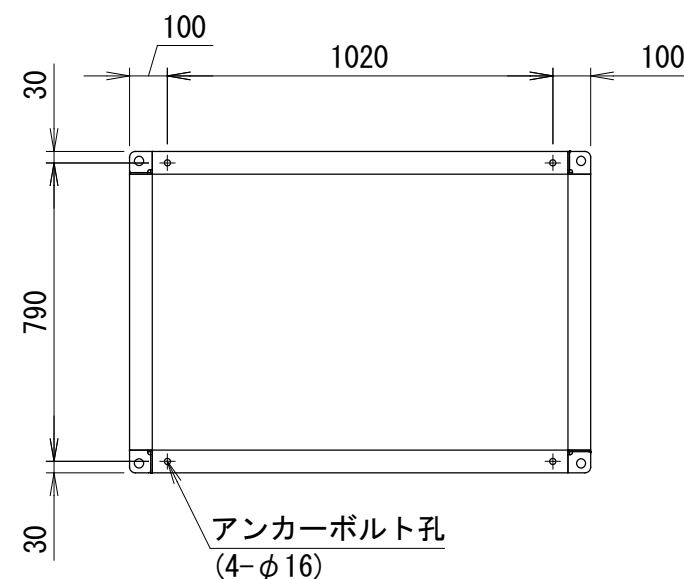


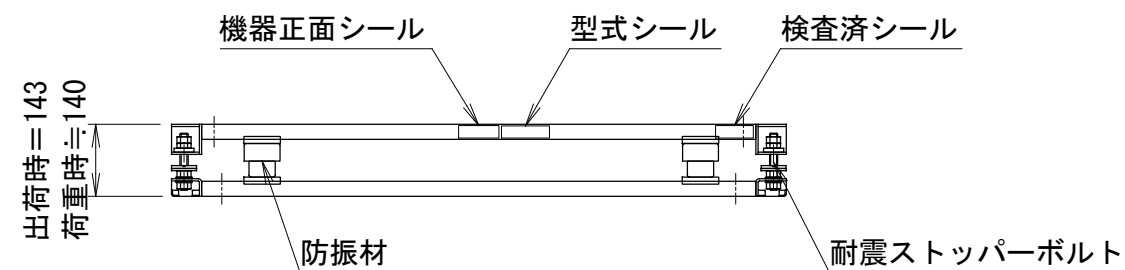

60~70

The diagram shows a mechanical assembly. A central component, which appears to be a valve or a connector, is mounted on a base. This central component is connected to a larger, rectangular block above it. Two horizontal lines, representing pipes or conduits, extend from the central component. The left line is labeled 'A' and the right line is labeled 'B'. Both lines have a break symbol (two parallel lines of unequal length) indicating they are not to scale. The entire assembly is shown in a cross-sectional or schematic view.

防振架台仕様書				
型式				
機器				
現場名				

系統名				
架台質量		34 kg		
防振材(コイルスプリング)				
NS250-80		5. 15[kgf/mm]	6 個	
上ベース	□60x30xt2. 3	17. 6 kg		
下ベース	□60x30xt2. 3	12. 0 kg		
耐震ストッパーボルト M16		4 本		
耐震基準		2. 0 G		
表面処理		溶融亜鉛めっき 2種・HDZ40		
適用地域		標準・塩害地域		
<付属品>				
機器固定ボルト		溶融亜鉛めっき M12x70L (平W, 角W, NTx2付)		
		4 組		
<備考>				
番号	日付	改訂記事		
発行日		承認	設計	作図
' 20. 10. 08		加納	内野	内野
ネミー株式会社				
図番		1-MDL351		