


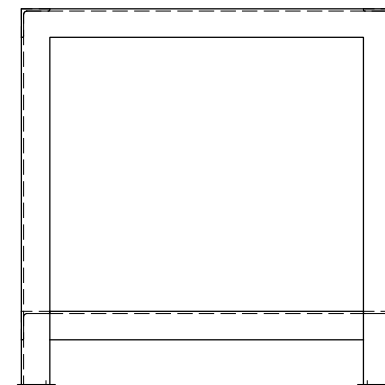

高置 A H 架台仕様書			
型式			
機器			
現場名			

系統名			
架台質量		90 kg	
主材		L75x75xt6 SS400	
表面処理		溶融亜鉛めっき 2種・HDZ45	
適用地域		標準・塩害・重塩害地域	
耐震基準		1.0 G	
<付属品>			
機器固定ボルト		溶融亜鉛めっき M12x50L (平W, 大形平W, NTx2付) 4 組	
防振架台固定ボルト		溶融亜鉛めっき M16x80L (平W, 角W, NTx2付) 4 組	
<備考>			
1. 架台の据付 底面全体で水平面に設置してください。			
2. アンカーボルトは含まれておりません。 先様にてご用意ください。			
3. 品質改善のため製品の仕様は予告無く 変更する場合があります。			
番号	日付	改訂記事	
発行日		承認	設計
' 20. 05. 08		加納	内野
ネミ一株式会社			
図番		3-NAG077#B1-10	

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 1350
- Overall height: 850
- Corner dimensions: 65 (width and height of the corner cutouts)
- Mounting holes: 4- $\phi 20$ (4 holes of diameter 20, located at the corners)
- Label: アンカーボルト孔 (4- $\phi 20$) (Anchor bolt holes (4- $\phi 20$))

Technical drawing of a square plate with a central hole and a corner reinforcement. The plate has a total width and height of 100. A central hole has a diameter of $\phi 20$. The distance from the center of the hole to the bottom edge is 65, and the distance from the center to the right edge is 65. A corner reinforcement, labeled 4-C10, is shown in the bottom-right corner with a thickness of t_6 . The reinforcement is positioned 10 units from the bottom edge and 10 units from the right edge.