
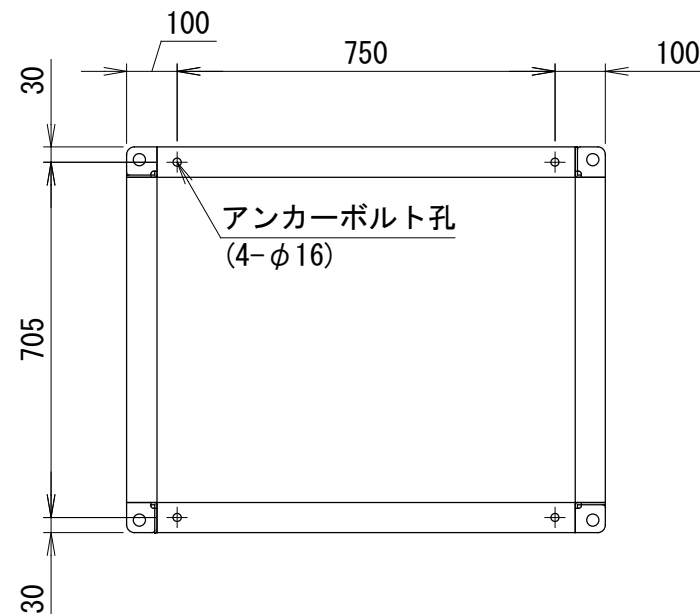


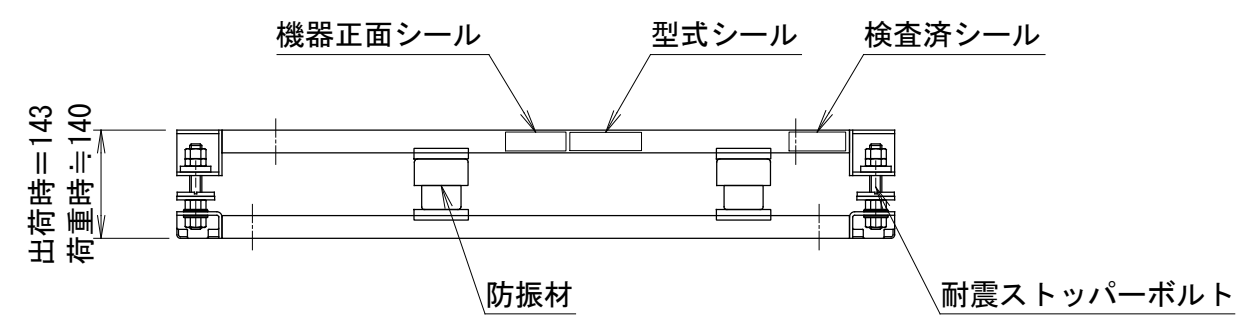

The diagram shows a mechanical assembly. A central component, which appears to be a small motor or actuator, is mounted on a base. This base is positioned between two horizontal plates. The left plate is labeled 'A' and the right plate is labeled 'B'. The central component is secured to the base by a bolt and nut. The entire assembly is shown in a cross-sectional view, with dashed lines indicating the internal structure of the plates and the central component.

防振架台仕様書			
型式	N－SPH950DCZ		
機器			
現場名			
系統名			
架台質量		27 kg	
防振材(コイルスプリング)			
NS250-65	4. 19 [kgf/mm]	6 個	
上ベース	□60x30xt2. 3	12. 9 kg	
下ベース	□60x30xt2. 3	9. 8 kg	
耐震ストッパーボルト		M16	4 本
耐震基準	△5 水平 2. 0 G, 鉛直 1. 0 G		
表面処理	溶融亜鉛めっき △5 HDZT56		
適用地域		標準・塩害地域	
<付属品>			
機器固定ボルト		溶融亜鉛めっき	
M12x70L (平W, 角W, NTx2付)		4 組	
<備考>			
番号	日付	改訂記事	
△4	' 20. 06. 26	図枠更新	
△5	' 23. 02. 24	耐震基準表記・めっき表記変更	
発行日	承認	設計	作図
' 16. 04. 15	加納	内野	内野
ネミー株式会社			
図番	1－HTB515		