
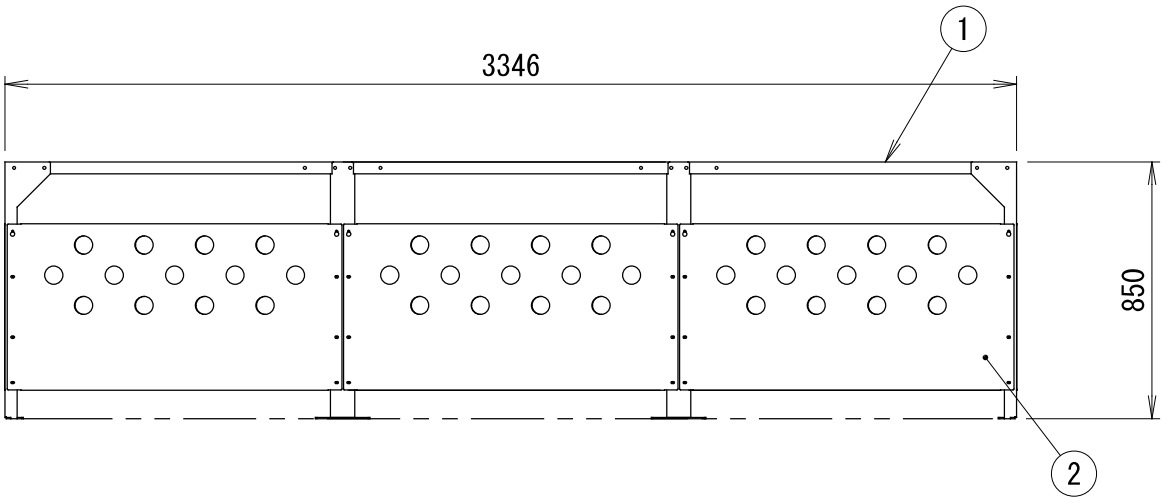
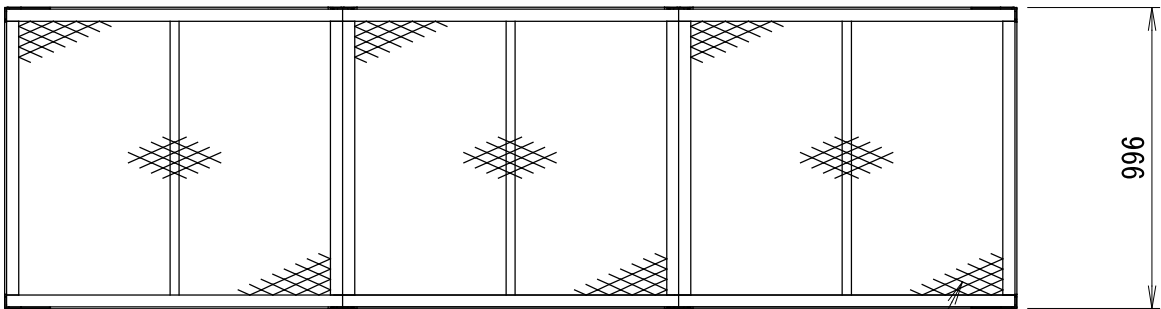



例. 3台連結の場合

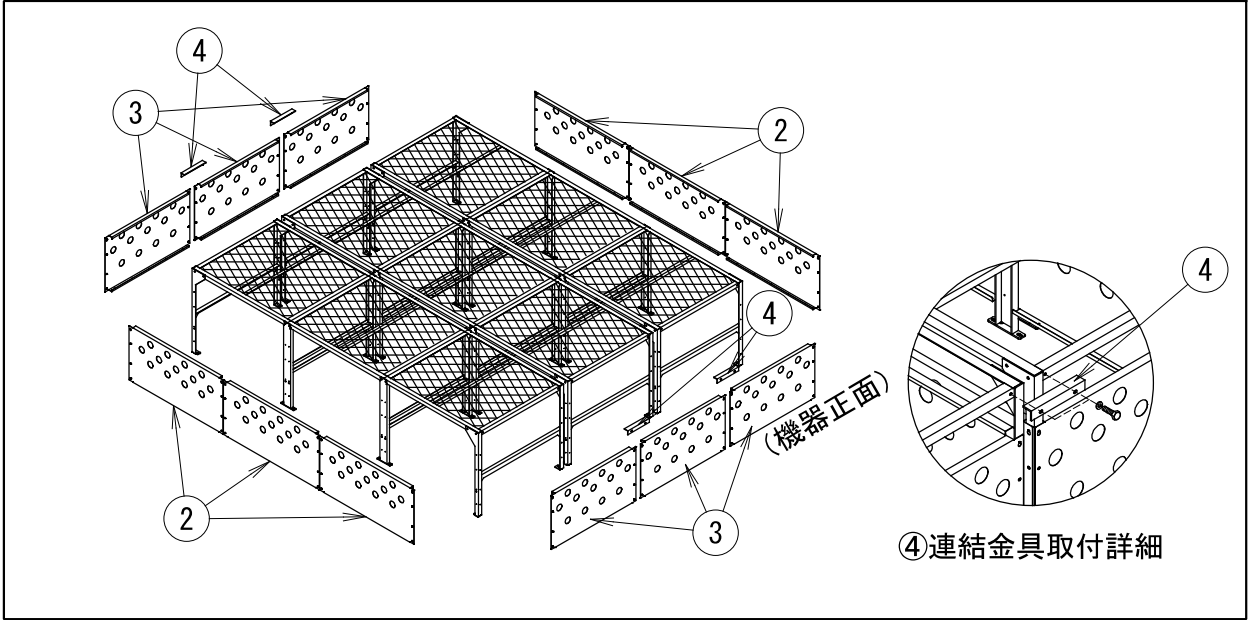

複数設置の場合

△

パンチングプレート・連結金具数量表(連結用)				
連結台数	①	② (6ヶ/組)	③ (2ヶ/組)	④ (2ヶ/組)
1台用	1	1	1	1
2台用	2	↑	2	2
3台用	3		3	3
4台用	4		4	4
5台用	5		5	5
6台用	6		6	6
7台用	7		7	7
8台用	8		8	8
9台用	9		9	9
10台用	10		10	10
11台用	11		11	11
12台用	12		12	12
13台用	13		13	13
14台用	14		14	14
15台用	15	↓	15	15
16台用	16	1	16	16

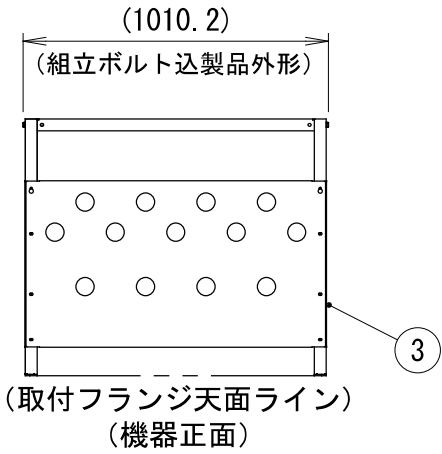

<注記>

1. 以下の設計基準を厳守して製品を使用してください。

設計基準風速:36m/s, 地表面粗度区分:Ⅲ, 設計水平震度:2.0G, GL~製品頂点までの高さ:30m以下
⇒満たせない場合は仕様書番号3-TCL107を使用してください。

2. 防雪ネット取付用フランジは機器メーカー様にて用意してください。
3. 防雪ネット取付用フランジ(20kg)・本製品及び積雪量の合計が400kgを超えると機器側に変形の恐れがあります。積雪時には適宜雪下ろしを行うことで積雪含めて400kgを超えないようにしてください。
⇒[参考]本製品への積雪35cmで約260kg分に相当します。

4. 本書中の規格値は相当仕様です。

防雪ネット仕様書

型式	NBNH-UPE11-F		
機器			

機器質量			
現場名			

系統名			
仕様			
材質		①④:SS400 ②③:SUS304	
製品質量		①:約76 (kg) ②:約5.4 (kg) ③:約4.8 (kg) ④:約0.7 (kg)	
表面処理		①④:溶融亜鉛めっき 2種・HDZ40 ②③:脱脂処理	
適用設置地域		一般/塩害地域	
付属品			
六角ボルト		M8	
エバタイトネジ		φ5	
その他			
現地組立式			

製品仕様は改良の為、予告無く変更する場合があります。